




GLOBAL TRADE SOLUTIONS

Seamless Elbows - Material: St.37 - 3S and 5S

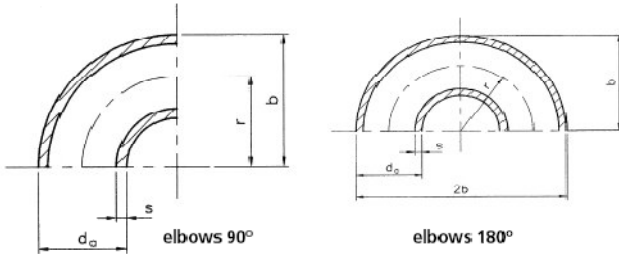


Seamless Carbon Steel Elbows to DIN 2605 part 1 type 3 and 5
Material: St. 37 / DIN 1629, Not Coated
Including Mill's Certificate as per EN 10204/3.1B

Dia (mm)	S (mm)	Radius S3	Radius S5	theor. Weight in kg	
				S3	S5
20	2	27.5		0.04	
21.3	2	27.5	42.5	0.04	0.07
25	2	27.5	52.5	0.05	0.10
26.9	2.3	29	57.5	0.07	0.13
30	2.6	33.5	62.5	0.09	0.17
31.8	2.6	35	67.5	0.11	0.20
33.7	2.6	38	72.5	0.12	0.23
33.7	4	38		0.18	
35	2.6	45		0.15	0.55
38	2.6	45	82.5	0.16	0.29
42.4	2.6	48	92.5	0.19	0.37
42.4	4	48		0.29	
44.5	2.6	51	97.5	0.22	0.41
48.3	2.6	57	107.5	0.27	0.50
48.3	4	57		0.39	
48.3	4.5	57		0.44	
51	2.6	63.5	230	0.31	0.56
57	2.9	72	255	0.44	0.78
60.3	2.9	76	135	0.49	0.88
60.3	4.5	76		0.74	
60.3	7.1	76		1.00	
63.5	2.9	82.5	142.5	0.57	0.97
70	2.9	92	160	0.70	1.21
76.1	2.9	95	175	0.79	1.45
76.1	4.5	95		1.19	
76.1	6.3	95		1.62	
76.1	10	95		2.50	
82.5	3.2	107.5	190	1.07	1.88
88.9	3.2	114	205	1.22	2.23
88.9	4.5	114		1.68	
88.9	7.1	114		2.50	
95	3.6	132.5	220	1.70	5.50
101.6	3.6	133.5	237.5	1.83	3.26
108	3.6	142.5	252.5	2.08	3.67
108	6.3	142.5			
114.3	3.6	152	270	2.37	3.89
114.3	4.5	152		2.92	



GLOBAL TRADE SOLUTIONS

Seamless Elbows - Material: St.37 - 3S and 5S

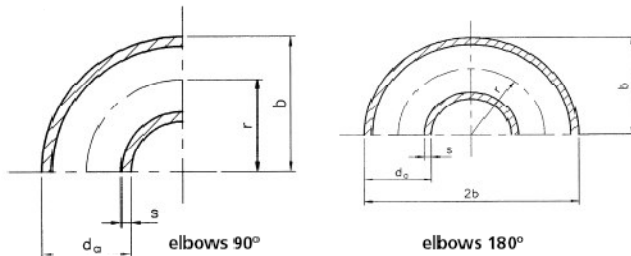

Seamless Carbon Steel Elbows to DIN 2605 part 1 type 3 and 5
Material: St. 37 / DIN 1629, Not Coated
Including Mill's Certificate as per EN 10204/3.1B

Dia (mm)	S (mm)	Radius S3	Radius S5	theor. Weight in kg	
				S3	S5
114.3	5	152		3.25	
114.3	8	152		5.00	
121	4	170	282.5	3.08	
127	4	175	300	3.30	5.70
133	4	181	312.5	3.64	6.30
139.7	4	190	330	4.04	7.00
139.7	5.6	190		5.58	
152.4	4.5	215	357.5	5.25	9.20
159	4.5	216	357	5.80	10.10
165.1	4.5	230		6.45	
168.3	4.5	229	390	6.50	11.10
168.3	6.3	229		9.04	
177.8	5	250		8.35	
193.7	5.6	270	455	10.60	21.80
219.1	6.3	305		14.90	
244.5	6.3	340		19.80	
267	6.3	378		24.10	
273	6.3	381	650	24.90	42.00
298.5	7.1	420		33.70	
318	7.5	455		41.00	
323.9	7.1	457	775	40.00	67.50
355.6	8	533	850	57.20	95.30
368	8	533.5		59.20	
406.4	8.8	610	970	82.20	137.00
419	10	609.5		96.60	
457	10	686		119.00	
470	10.5	672.5		126.00	
508	11	762		162.00	
521	11.5	747.5		169.00	

All above sizes are also available in 45 degrees and 180 degrees
Surface Treatment standard Sandpolish